

## Lemur-X UPG Bezel Installation Guide P/N 424076-UPG-X-TM-1C

The following is to be done with the printer powered off and unplugged from the AC source.

1. The bezel kit comes with bezel and two 5/16" Hex Head screws.





2. The bezel mounts onto the Lemur-X printer via the two holes shown below.



3. Unlock the print head assembly and lift up to allow easy access to the mounting holes.
4. Insert the two 5/16" Hex head screws into the bezel.



5. Align the two screws with the two top holes on the Lemur-X. Tighten the two screws.

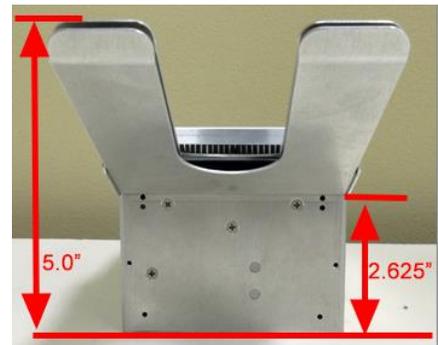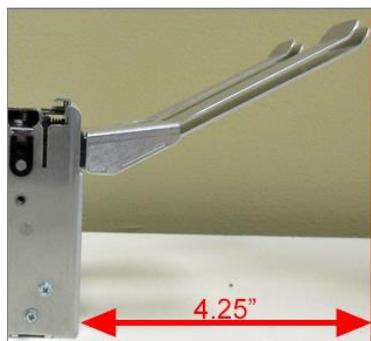

6. The bezel is now installed. Lock the print head assembly back closed.