



## Roll Holder Adaptor Kit for Lemur & Lemur-K (P/N 424185) 09/02/25

Roll holder may be used with UPG and non-UPG ADJ2 path printers.

Kit will include floor plate (2pcs), one roll holder arm, one spindle, one adjustable stopper and various mounting screws.




Part may vary from above photo

1. Attach the spindle onto the roll holder arm using the two Philip 1/4" Hex head screws.




2. Align the two floor plate pieces so that the two screw holes align. Make sure the piece with the rubber feet is on the bottom with rubber feet facing up. Install the two self-tapping 3/16" hex head screw and tighten.

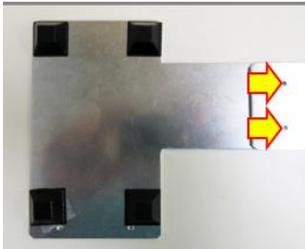

3. Install the floor plate onto the bottom of the Lemur UPG printer. Align the two holes on the floor plate up with the two mounting holes on the printer. Install the two self-tapping 1/4" hex head screws and tighten.





4. Flip both the Lemur and attached floor plate so all rubber feet are facing down.

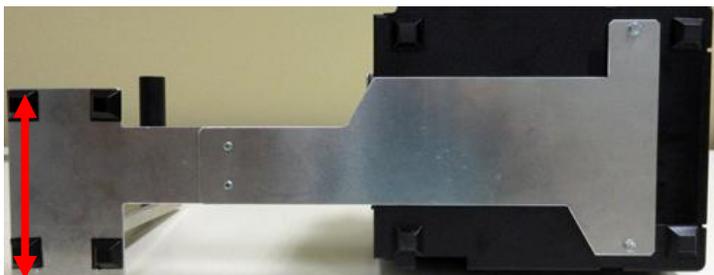


5.00" wide


5. There are two sets of alignment holes. Use the holes that matches the paper path the printer has. Align the two holes on the roll holder up with the two mounting holes on the floor plate. Install the two self-tapping 3/16" hex head screws and tighten.

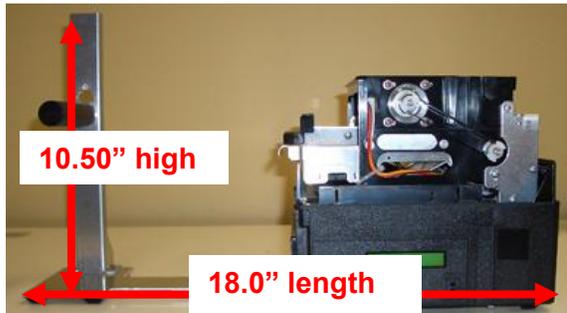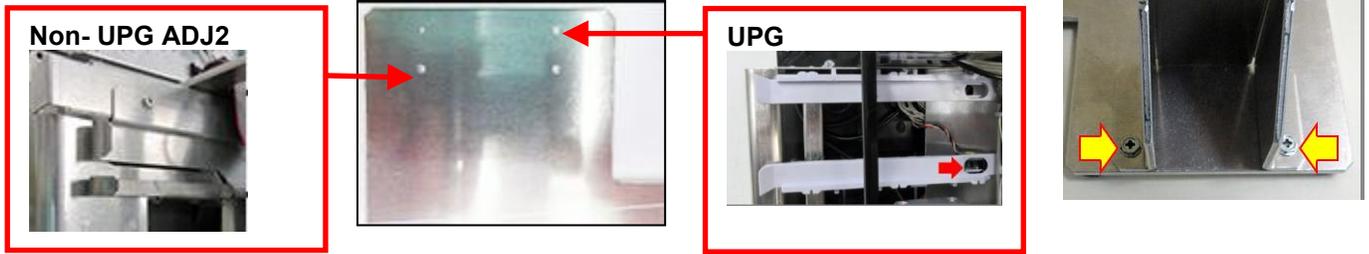



6. Tear off a full turn of the paper or media from the new roll. **Caution:** It is important that the outer end of the media is free of glue or other adhesive substance that may cause a paper jam or damage the print head.

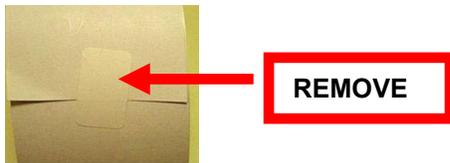

7. Place the roll onto the spindle so the media turns in a clockwise direction.

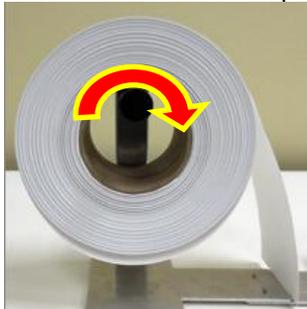

8. Install the adjustable stopper disc onto the spindle and slide into place. The stopper should not be binding against the roll to prevent it from moving freely.

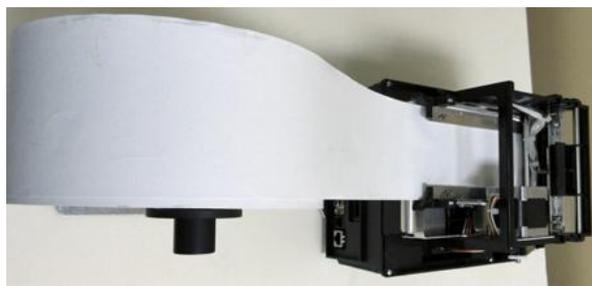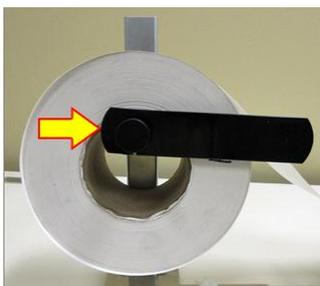

The Ticket Load Procedure section of the user manual (see link below) reviews how to load media into the printer.

[http://www.bocasystems.com/documents/lemur\\_manual.pdf](http://www.bocasystems.com/documents/lemur_manual.pdf)